

**CHAPTER 13  
STREETS, DRIVEWAYS AND SIDEWALKS  
PART B  
Driveway Ordinance**

---

GENERAL INFORMATION

Location (Twp. Rt. No. or Road Name): \_\_\_\_\_

Approximate Dates: Work To Be Started \_\_\_\_\_, To Be Completed \_\_\_\_\_

Type of Driveway Proposed: ( ) Residential, ( ) Commercial, ( ) Industrial

Driveway Surface (First 20 ft. must be paved). Balance of Driveway: ( ) Paved, ( ) Stoned

Driveway Paving Specifications \_\_\_\_\_

Proposed Driveway Stormwater Control: ( ) Swale, ( ) Pipe (min. 15 inch diameter)

Stormwater Calculations Attached: ( ) Yes, ( ) No

NOTE:

1. All work shall be in accordance with the North Manheim Township Driveway Ordinance as amended (cope attached).
2. The prescribed permit fee(s) shall be accompany the application and sketch. The fee shall be paid by check or money order, and shall be made payable to North Manheim Township Supervisors.
3. All work shall be completed within a maximum of one (1) year from issuance date of the driveway permit and permit will be voided unless extended by written request.

FEE: Amount attached \$ \_\_\_\_\_

Check No. \_\_\_\_\_

The undersigned, by applying for this permit under the North Manheim Township Driveway Ordinance agrees by making said application to indemnify and save the Township and its agents, servants, employees and/or contractors harmless from and against all liabilities of whatever nature arising during the performance of the work or as a result of the work for which a permit is granted, whether or not the liability arises as a result of the negligence of the person, firm, corporation, or other entity to whom the permit was issued.

\_\_\_\_\_  
Name of Applicant / Agent

\_\_\_\_\_  
Owner Name (if different from Applicant)


\_\_\_\_\_  
Applicant Signature

\_\_\_\_\_  
Owner Signature

\_\_\_\_\_  
Date

\_\_\_\_\_  
Date

**CHAPTER 13**  
**STREETS, DRIVEWAYS AND SIDEWALKS**  
**PART B**  
**Driveway Ordinance**

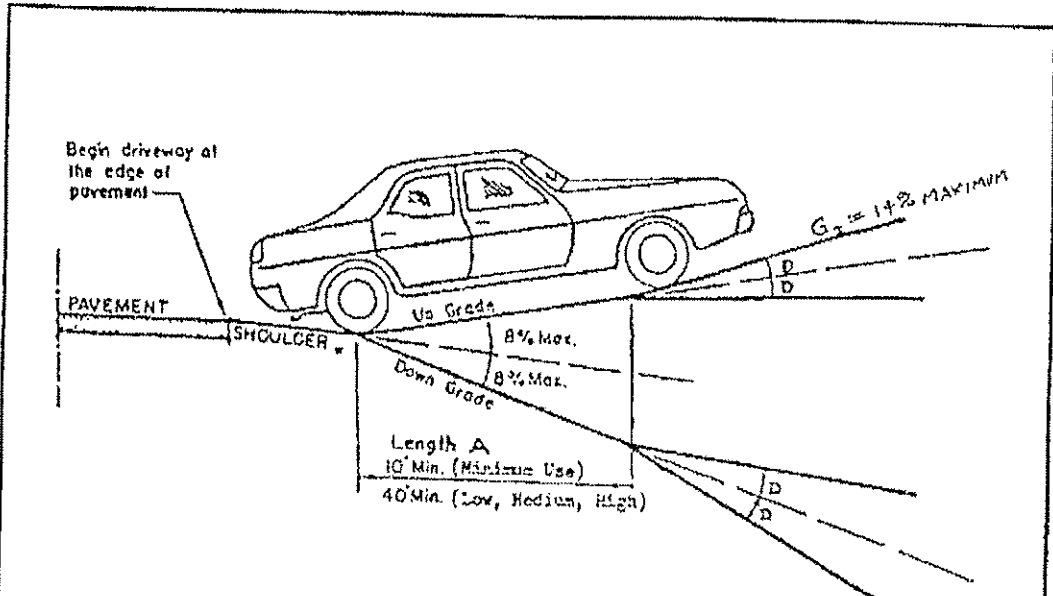

\* The shoulder slope usually varies from 1/2"/ft. (4%) to 3/4"/ft. (6%). However, the shoulder slope should be maintained when constructing the driveway


For grade changes greater than those shown in the figure above, vertical curves at least ten (10) feet long shall be constructed and length "A" shall be increased.

Grades (G2) shall be limited to fourteen percent (14%) for minimum use driveways and from five percent (5%) to eight percent (8%) for low, medium or high volume driveways within the right-of-way.

Driveway Type	Maximum Grade Change (D)	
	Desirable	Maximum
High Volume Driveway	0%	+/- 3%
Medium Volume Driveway	+/- 3%	+/- 6%
Low Volume Driveway	+/- 6%	Controlled by Vehicle Clearance


**DRIVEWAY GRADES**  
**DRIVEWAY ORDINANCE EXHIBITS**  
**NORTH MANHEIM TOWNSHIP**

CHAPTER 13  
STREETS, DRIVEWAYS AND SIDEWALKS  
PART B  
Driveway Ordinance

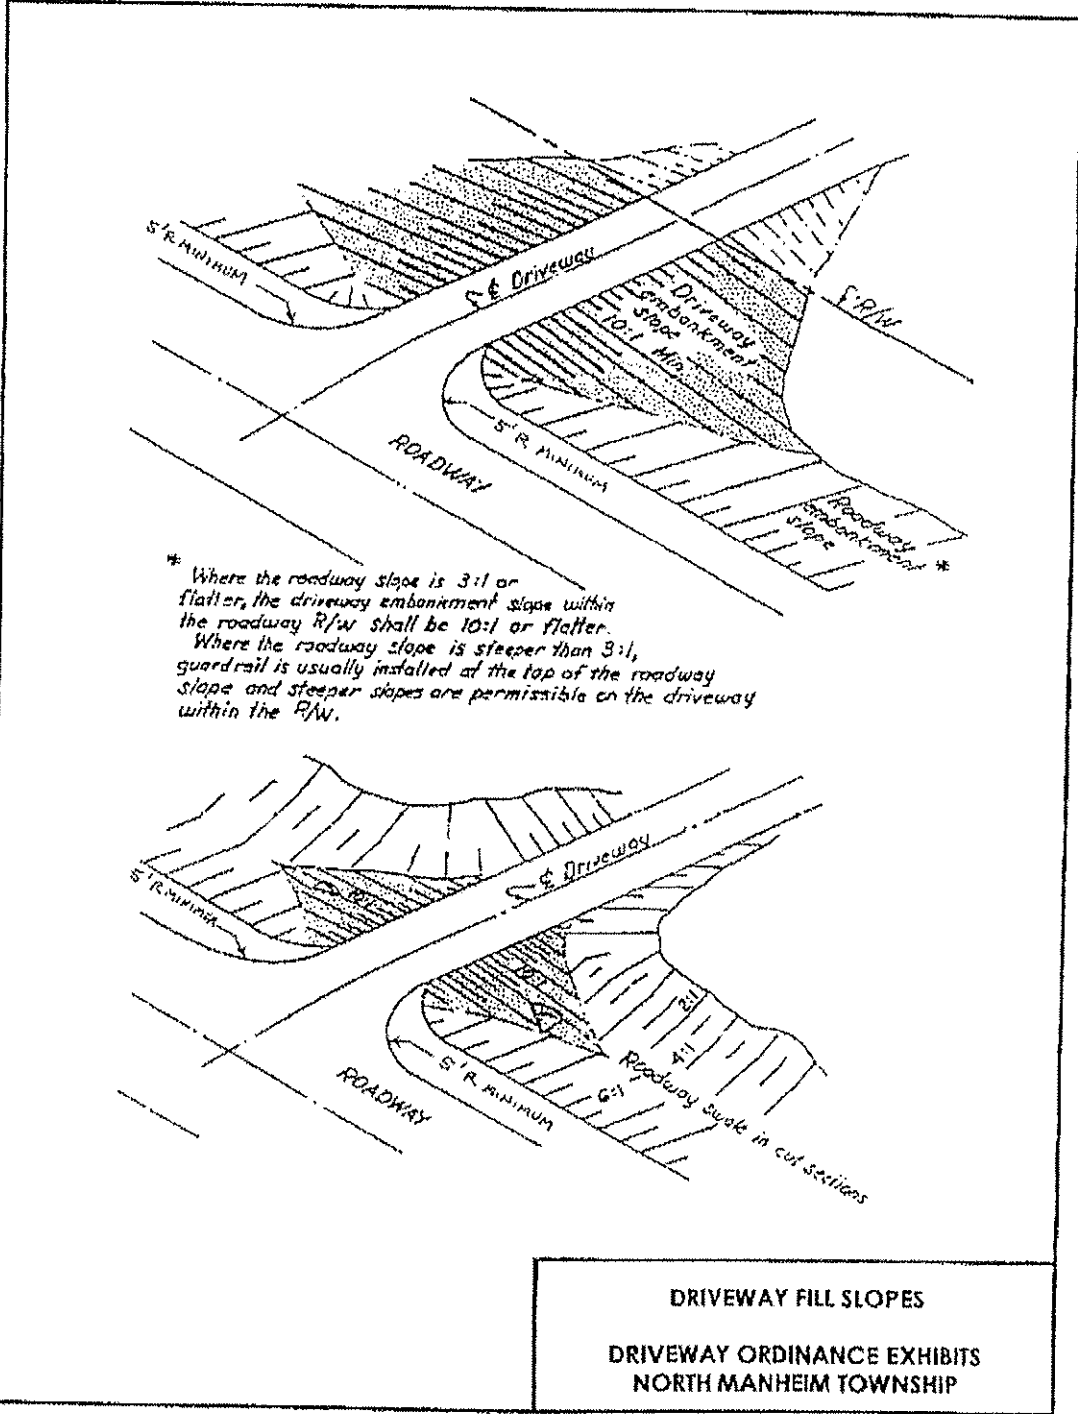


\* Where the roadway slope is 3:1 or flatter, the driveway embankment slope within the roadway R/W shall be 10:1 or flatter. Where the roadway slope is steeper than 3:1, guardrail is usually installed at the top of the roadway slope and steeper slopes are permissible on the driveway within the R/W.

**CHAPTER 13**  
**STREETS, DRIVEWAYS AND SIDEWALKS**  
**PART B**  
**Driveway Ordinance**

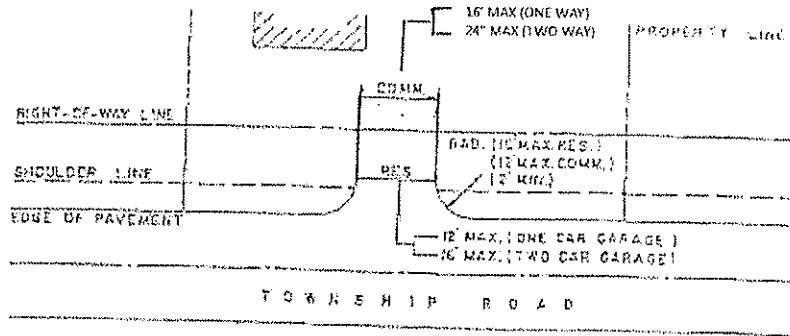

PLAN VIEW OF DRIVEWAY ENTRANCE WHERE CONCRETE CURBS AND SIDEWALKS DO NOT EXIST.

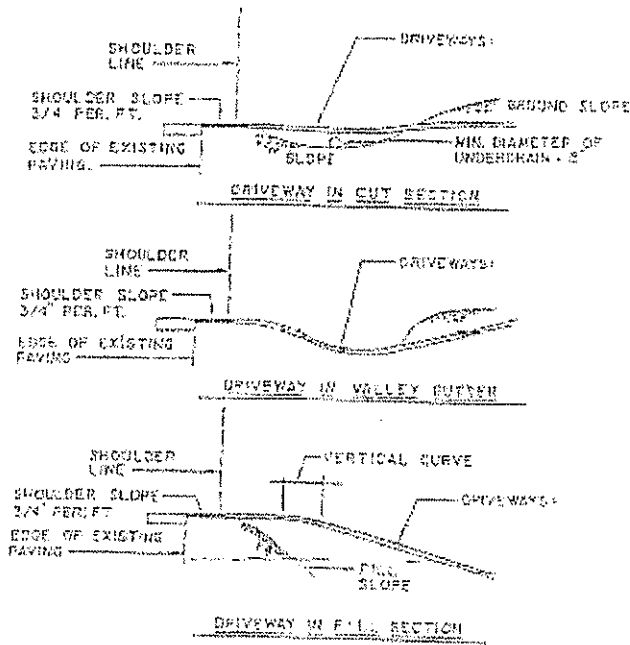

TYPICAL CROSS-SECTIONS OF DRIVEWAYS WHERE CONCRETE CURBS AND SIDEWALKS DO NOT EXIST.

**PLAN VIEW AND SECTIONS**  
**DRIVEWAY ORDINANCE EXHIBITS**  
**NORTH MANHEIM TOWNSHIP**